

LED indoor light without sensor - Professional Line

RS PRO Connect R20 Q SL

Neutral white

EAN 4007841 057169

Article number 057169



LED

36 years (Ø 4,5h / day)



Settings via App

4000 K

4000K neutral white



soft light start



Backlight



shock proof IK07



connectable via bluetooth

5 years

manufacturer's warranty
steinel.de/garantie5y



CE



ENEC 10

Function description

Connected lighting squared. In conjunction with the master version, the slave version of the RS PRO Connect R20 Q without sensor is easily interconnected via Bluetooth to create lighting groups. Perfect light distribution – ideal for corridors, hallways and stairwells. Output: 16 W providing 1950 lm of light. 4000 K, Dimensions: 300 x 300 x 55 mm

Technical specifications

Dimensions (L x W x H)	55 x 300 x 300 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Output	16 W
Colour temperature	4000 K
Colour variation LED	SDCM3
Colour Rendering Index	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Drop in luminous flux in accordance with LM80	L80B50
Base	without
LED cooling system	Passive Thermo Control
With motion detector	No
Continuous light	selectable
Photo-cell controller	No
Basic light level function, detail	LED Backlight

Main light adjustable	50 - 100 %
Functions	Backlight
Soft light start	Yes
Impact resistance	IK07
IP-rating	IP40
Protection class	II
Ambient temperature	-20 – 40 °C
Housing material	Plastic
Cover material	PC, opal
Manufacturer's Warranty	5 years
Settings via	Bluetooth
With remote control	No
Installation site	wall, ceiling
Version	Neutral white
PU1, EAN	4007841057169

Accessories

EAN 4007841 057152

RS PRO Connect R20 Q

LED indoor light without sensor - Professional Line

RS PRO Connect R20 Q SL


Neutral white

EAN 4007841 057169


Article number 057169



Dimension Drawing

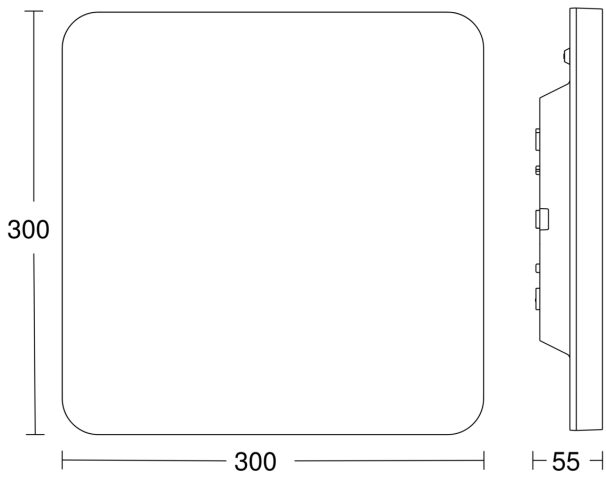

Slave/wireless master interconnection circuit diagram



Master/master interconnection circuit diagram

