

## **BRUMBERG**

### LED wall recessed light, IP54

Artikel-Nr. 10011223

Licht. Für Generationen.

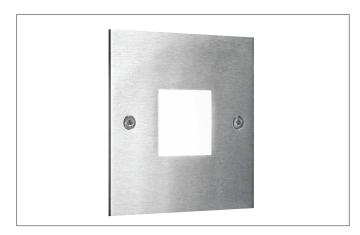





#### Tondor

LED wall recessed light, IP54, stainless steel, square. Recessed mounting, Wall-mounted. Including a converter for connection with the 230-V mains voltage, on/off switchable and cavity wall mounting box Ø DA: 68 mm / installation depth: 65 mm. Mounting method: Recessed mounting, Place of installation: Wall-mounted, Material: Stainless steel / Acrylic / Plastic / Silicone rubber, Degree of protection: according to DIN EN 60529 IP54\*, Protection class: (EN 61140) I, Voltage: 230V AC 50Hz, Power: 1.2W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 40lm, Colour temperature: 3.000 K, Light colour: White, Adjustability: Not adjustable, With control gear: Yes, Con-

Article data	
Artikel-Nr.	10011223
GTIN	4250047765745
Kurzbeschreibung	LED wall recessed light, IP54
Material	Stainless steel / Acrylic / Plastic / Rubber
Colour	Stainless steel
Shape	square
Built-in diameter	68 mm
Installation depth	65 mm
Width	80 mm
Aufbauhöhe	80 mm
weight	0.172 kg

# **BRUMBERG**

## LED wall recessed light, IP54

Artikel-Nr. 10011223

Licht. Für Generationen.

Lighting technology	
Colour temperature	3000 K
Light colour	White
Luminous flux	40 lm
System efficiency	33 lm/W
Colour rendering	CRI > 80
Reflector	Without
Light sharing	Symmetric

Operating technology of the luminaires	
System output	1.2 W
Voltage type	AC
AC nominal voltage max	230 V
Frequenz max.	50 Hz
Lamp	LED
Protection class	
Degree of protection	IP54
Control	on/off
Leuchtmittelwechsel möglich	ja

Operating technology of driver	
Control	on/off

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Wall-mounted
Adjustability	Not adjustable
Further references	No cover with thermal insulation material
Material cover	Plastic, opal

Packing data		
Gross weight	0.202 kg	
Length of packaging	95 mm	
Packaging width	75 mm	
Packaging height	95 mm	