


LED floodlight without sensor

XLED ONE

Anthracite

EAN 4007841 065201

Article number 065201

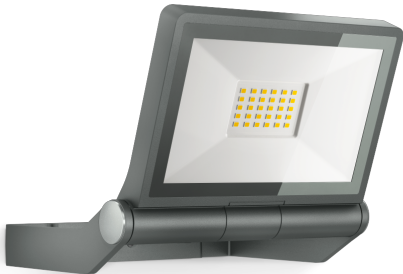

LED

long life LED
50.000 h

3000 K

3000K
warm-white



IP44



Panel 180° vertical



indoor/outdoor
light



energy saving

3 years


manufacturer's
warranty
steinel.de/garantie3y

CE

CE



Light source not
exchangeable



Control gear not
exchangeable

Function description

Astonishingly efficient. Extra-long service life. The XLED ONE wall and ceiling spot impresses with modern LED technology and provides 3000 K and 2050 lm of warm white light from an energy-saving 17,8 W. The aluminium panel can be tilted through 180°. With high-quality and powerful reflector as well as long-life LEDs (30 years).

Technical specifications

Dimensions (L x W x H)	173 x 229 x 195 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Output	17,8 W
Lichtstrom Gesamtprodukt	2050 lm
Efficiency (without shade/diffuser)	110 lm/W
Gesamtprodukt Effizienz	115 lm/W
Colour temperature	3000 K
Colour variation LED	SDCM3
Colour Rendering Index	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
LED life expectancy (25 °C)	> 36000 h
Drop in luminous flux in accordance with LM80	L70B10

Base	without
LED cooling system	Passive Thermo Control
With motion detector	No
Photo-cell controller	No
Basic light level function	No
IP-rating	IP44
Protection class	I
Ambient temperature	-20 – 40 °C
Housing material	Aluminium
Manufacturer's Warranty	3 years
Installation site	ceiling, wall
Version	Anthracite
PU1, EAN	4007841065201

LED floodlight without sensor

XLED ONE

Anthracite

EAN 4007841 065201

Article number 065201



Dimension Drawing

